

## Product information AVOL STREICHERT h\_CODE 10W-40




### Description:

Semisynthetic motor oil. Guarantees maximum performance even with long oil-change intervals. Provides the ideal oil pressure under all operating conditions. Fast cold-start oiling provides excellent engine wear protection during the start and warm-up phase.

### Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA A3/B4-16  
API SN/CF  
Fiat 9.55535-D2/G2  
MB 229.3/229.1  
PSA B71 2300  
Renault RN0710/0700  
VW 502.00/505.00

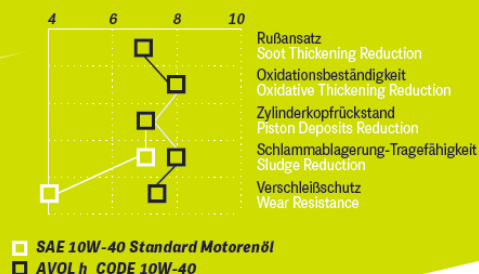

### Technical data:

SAE class (engine oils)	10W-40 SAE J300
Density at 20°C	0.867 g/ml EN ISO 3675
Viscosity at 40°C	98.2 mm <sup>2</sup> /s EN ISO 3104
Viscosity at 100°C	14.7 mm <sup>2</sup> /s EN ISO 3104
Viscosity index	156 ISO 2909
Pour point	-37°C ISO 3016
Flash point	229°C EN ISO 2592
Total base number	10.0 mg KOH/g ASTM D 2896
Sulfate ash	1.1 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.