

Product information AVOL STREICHERT s_PUR 5W-30




Description:

Fully synthetic motor oil, the Longlife 3 generation. Exceeds the strictest test requirements demanded by renowned manufacturers. Secures the functional performance of the diesel particulate filter and ensures the longest possible service life. With improved wear-protection formula. Especially for vehicles with extremely long oil change intervals.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA C3, C2-16
BMW Longlife-04
Chrysler MS-11106
Fiat 9.55535-S1/S3
GM dexos2
Iveco 18-1811 Classe SC1
MB 229.52
MB 229.51/229.31
Porsche C30
PSA B71 2290
Renault RN17
VW 503.01/506.01
VW 504.00/507.00

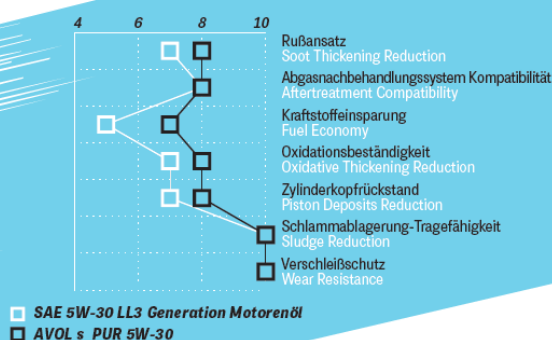

Technical data:

SAE class (engine oils)
Density at 20°C
Viscosity at 40°C
Viscosity at 100°C
Viscosity index
Pour point
Flash point
Total base number
Sulfate ash

5W-30 SAE J300
0.840 g/ml EN ISO 3675
64.3 mm²/s EN ISO 3104
11.7 mm²/s EN ISO 3104
180 ISO 2909
-50°C ISO 3016
235°C EN ISO 2592
8.7 mg KOH/g ASTM D 2896
0.7 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.