

Product information

AVOL STREICHERT s_RASCH 5W-30




Description:

Fully synthetic motor oil. Guarantees maximum performance even with long oil-change intervals. Provides the ideal oil pressure under all operating conditions. Fast cold-start oiling provides excellent engine wear protection during the start and warm-up phase.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA A3/B4-16
API SN/CF
BMW Longlife-01
GM-LL-A-025 (B-040-2095)
GM-LL-B-025 (B-040-2098)
MB 229.5, 229.3
Renault RN0700/0710
VW 502.00/505.00

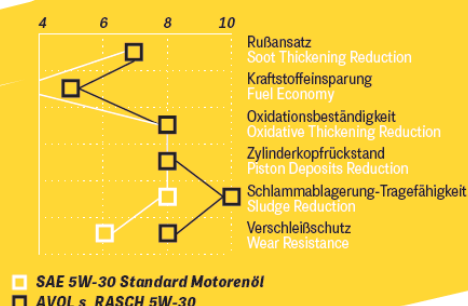

Technical data:

SAE class (engine oils)	5W-30 SAE J300
Density at 20°C	0.844 g/ml EN ISO 3675
Viscosity at 40°C	61.1 mm ² /s EN ISO 3104
Viscosity at 100°C	11.3 mm ² /s EN ISO 3104
Viscosity index	181 ISO 2909
Pour point	-49°C ISO 3016
Flash point	238°C EN ISO 2592
Total base number	10.0 mg KOH/g ASTM D 2896
Sulfate ash	1.0 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.