
Product information AVOL STREICHERT s_REIN 5W-30



Description:

Fully synthetic low-ash motor oil for use all year round. The combination of PAO-basic oils, unconventional basic oils using synthetic technology together with the latest additive technology provides exceptional protection against wear and reduces oil and fuel consumption, ensuring fast oil penetration of the engine. Renault requires a motor oil with this specification for various models with diesel particulate filters to ensure the maximum service life of the DPF.

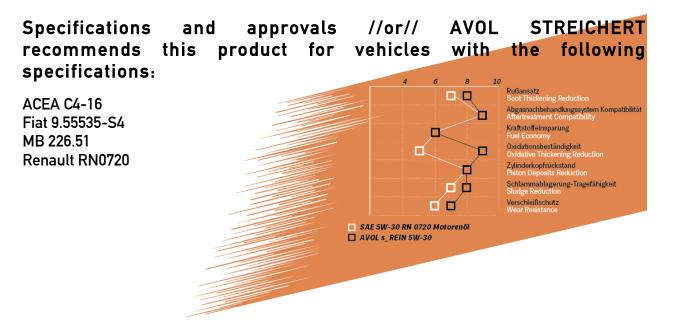

Technical data:

SAE class (engine oils) Density at 20°C Viscosity at 40°C Viscosity at 100°C Viscosity index Pour point Flash point Total base number Sulfate ash 5W-30 SAE J300 0.853 g/ml EN ISO 3675 66.3 mm²/s EN ISO 3104 11.7 mm²/s EN ISO 3104 174 ISO 2909 -42°C ISO 3016 230°C EN ISO 2592 6.5 mg KOH/g ASTM D 2896 0.4 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.

OESEH GmbH @: info@avol.at Jordangasse 7/12 1010 Vienna, Austria