

## Product information AVOL STREICHERT s\_STARK 0W-30




### Description:

Fully synthetic motor oil for extreme operating conditions. Maximum lubrication reliability, ideal oil pressure and maximum wear protection. For petrol and diesel engines. Tested safe with catalytic converters and turbochargers. AVOL STREICHERT recommends this product for gasoline vehicles from BMW, MB and numerous other manufacturers.

### Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA A3/B4-16  
API SN/CF  
BMW Longlife-01  
MB 229.5, MB 229.3  
Volvo VCC 95200356  
VW 502.00/505.00  
VW 503.01

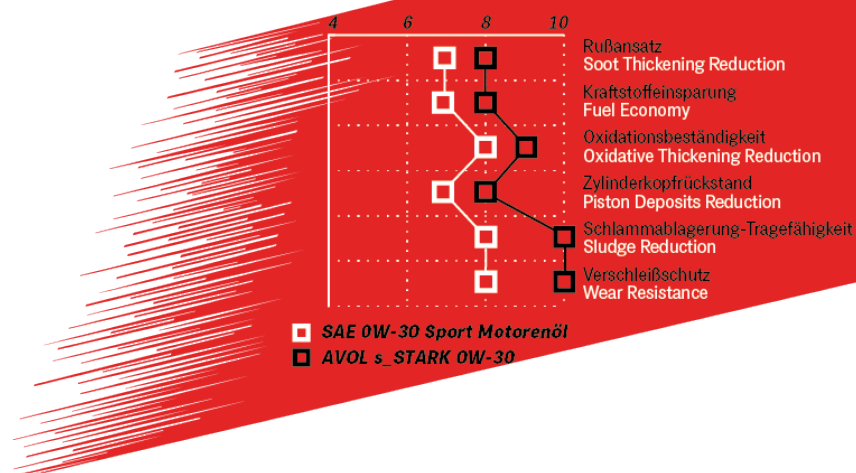

### Technical data:

SAE class (engine oils)	0W-30 SAE J300
Density at 20°C	0.839 g/ml EN ISO 3675
Viscosity at 40°C	61.1 mm <sup>2</sup> /s EN ISO 3104
Viscosity at 100°C	11.4 mm <sup>2</sup> /s EN ISO 3104
Viscosity index	184 ISO 2909
Pour point	-55°C ISO 3016
Flash point	231°C EN ISO 2592
Total base number	11.2 mg KOH/g ASTM D 2896
Sulfate ash	1.1 g/100g EN ISO 3987

Our information is based on thorough research and may be considered reliable, although not legally binding.