

Product information

AVOL STREICHERT s_STARK 0W-40




Description:

Fully synthetic motor oil for extreme operating conditions. Maximum lubrication reliability, ideal oil pressure and maximum wear protection. For petrol and diesel engines. Tested safe with catalytic converters and turbochargers. AVOL STREICHERT recommends this product for MB AMG.

Specifications and approvals //or// AVOL STREICHERT recommends this product for vehicles with the following specifications:

ACEA A3/B4-16
API SN/CF
BMW Longlife-01
Chrysler MS-10725
Chrysler MS-12633
Fiat 9.55535-M2/Z2
Ford WWS-M2C937-A
MB 229.5
MB-AMG
Porsche A40
Renault RN0710/RN0700
VW 502.00/505.00
VW 503.01

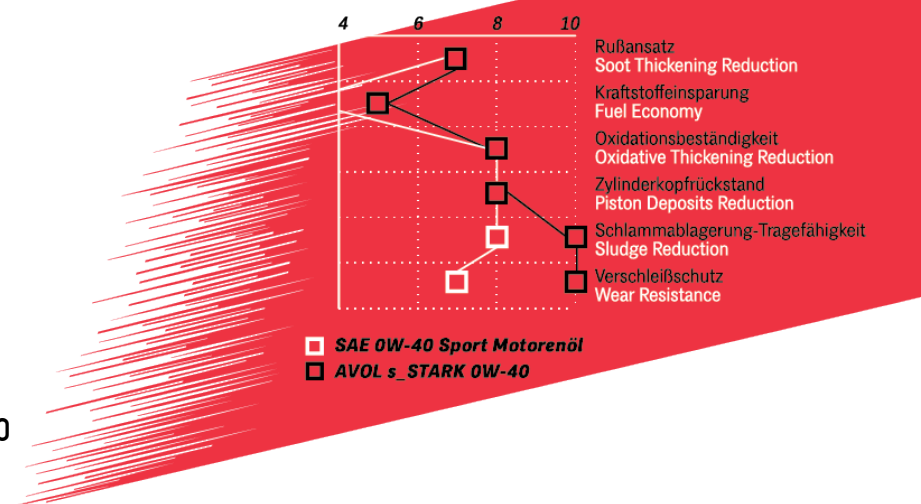

Technical data:

| | |
|-------------------------|-------------------------------------|
| SAE class (engine oils) | 0W-40 SAE J300 |
| Density at 20°C | 0.842 g/ml EN ISO 3675 |
| Viscosity at 40°C | 77.1 mm ² /s EN ISO 3104 |
| Viscosity at 100°C | 13.7 mm ² /s EN ISO 3104 |
| Viscosity index | 183 ISO 2909 |
| Pour point | -53°C ISO 3016 |
| Flash point | 227°C EN ISO 2592 |
| Total base number | 11.4 mg KOH/g ASTM D 2896 |
| Sulfate ash | 1.1 g/100g EN ISO 3987 |

Our information is based on thorough research and may be considered reliable, although not legally binding.